

Backflow Prevention at West 103rd Street

Project: West 103rd Street – Multi-Family

Block(s): 1839, **Lot(s):** 21, 22, 27, 28, 125

Project Size: 5,500 sqft (Cellars Only)

Project Cost: Approx. 12,500 - 15,000 USD

Scope of Work: Water Service Assembly Installation/Update

West 103rd Street consists of 5 multi-family buildings with 69 residential units. Preliminary survey of the existing water service began August 2018 while design of the proposed installation (cross-connection control plan) began early September 2018. The alterations consisted of relocating existing plumbing fixtures to a point where it is easily accessible for testing and maintenance. The proposed BFP device was a 350XL DCV which was sufficient for a residential building with no significant risk of cross-connection hazards.

The cross-connection control plans were approved by the NYC DEP on October 2018 and work began in the same month. Final survey was conducted on November 2018 to ensure compliance with NYC building codes and regulations.




Existing multi-family residential building 2018




TaxMap of West 103rd Street, Manhattan

A backflow prevention (BFP) device protects the public from contaminated water flowing backwards into the main water supply. To ensure proper design and installation, the BFP device should be of a certain type and size depending on the type of building and the existing/proposed plumbing, respectively. It should also be installed in the correct location, orientation, with clearances for several reasons.

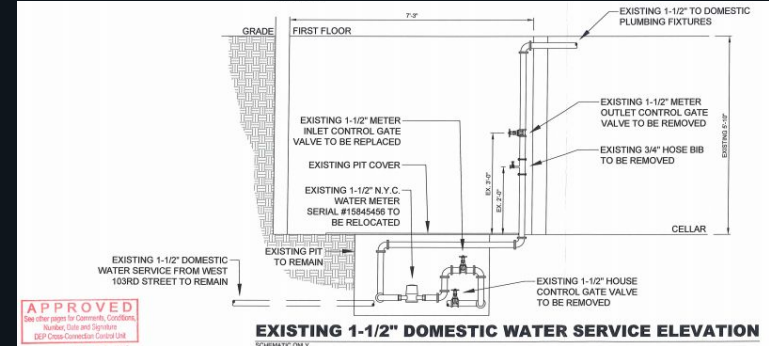

5 West 103rd Street Existing Service

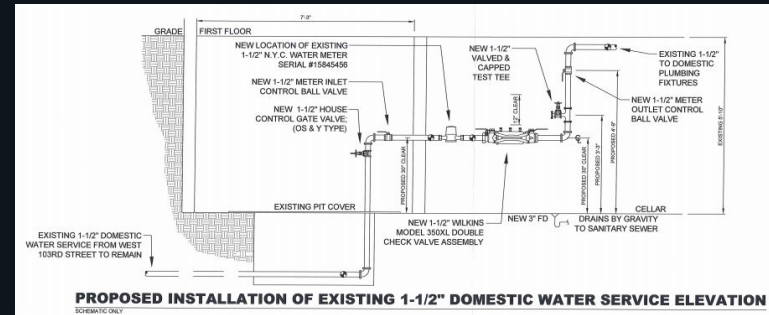

5 West 103rd Street Proposed Service