

Fire Protection at 25-40 31st Street

Project: 25-40 31st Street - Mixed-Use Building
Block(s): 598, Lot(s): 42

Project Size: 21,000 sqft
Project Cost: Approx. 25,000 - 30,000 USD
Scope of Work: Combination Standpipe and Fire Sprinkler System

This project was a proposed 7-story, 16-unit mixed-use building located in Astoria, Queens, New York. This building required a fire standpipe service alongside the fire sprinkler service due to the height of the most remote area.

Coordinating with the owner is a great way to build a good relationship with clientele. A common practice of mine is to visit the site prior to ceiling installation of each floor so that I had visibility of all fire sprinkler/standpipe installation ensuring a better inspection. This also allowed the owner to make any modification to the installation without having to destroy and re-install the ceilings. A fire sprinkler system can be designed via the pipe schedule method or the hydraulic calculated method. In most cases, our office uses the hydraulic calculated method. Each pipe material, pipe size, pipe length, pipe fitting, fire sprinkler head model and any device (including the BFP) between the incoming service and the most remote sprinkler area is added into the Fire Elite Software. This software plots a graph indicating if there is enough water pressure to reach the furthest / most hazardous part of the building. The final survey should comply with our design drawings, NFPA13, and the NYC BC.



Existing residential building Lots: 42, & 43 2019



New mixed-use building Merged Lot: 42 2021




TaxMap of 25-40 31st Street



Installation of fire sprinkler riser



Exposed fire sprinkler pipes

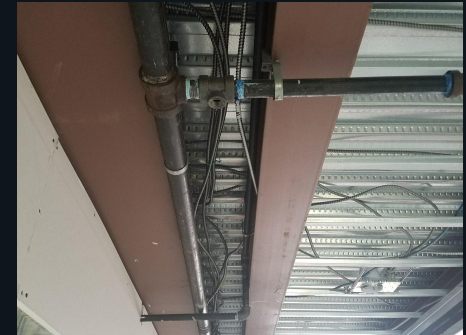

Exposed fire sprinkler pipes